


## Model 411 Posiflo Silencer

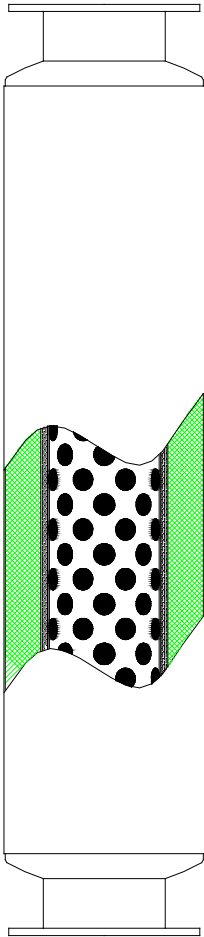


### Standard Features:

- ✓ All Steel Welded Construction
- ✓ Quality Fabrication Techniques
- ✓ Fiberglass Absorptive Pack
- ✓ Threaded Connections in Small Sizes
- ✓ Plate Flanges to Match ASA 125# Flanges
- ✓ Prime Coated Exterior Surfaces

### Optional Features:


- ✓ Materials as Specified
- ✓ Finish as Specified
- ✓ Mounting brackets
- ✓ Companion Flanges
- ✓ Flange Drilling as Specified

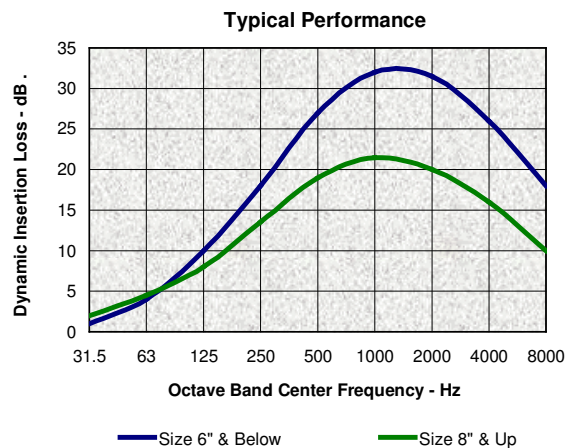

### Application:

The **VANEC** Model 411 Posiflo Silencer is designed for use in suppressing the discharge noise from small pneumatic vents, high-speed blowers, fans and centrifugal air handling devices operating above atmospheric pressure. The **VANEC** Model 411 Posiflo Silencer may be mounted either vertically or horizontally.

For an even lower community noise level, see **VANEC** Model 421.

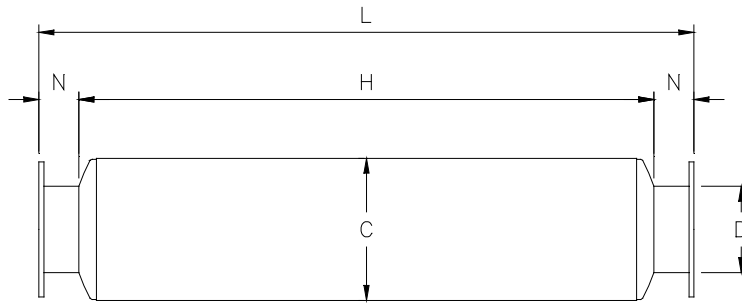

UNITS SIZE 4" & SMALLER ARE SUPPLIED WITH THREADED NOZZLES

### VANEC Model 411

Model	Dimensions in Inches					Est. Wt. Lbs.
	C	D	H	L	N	
411-1/2	3 ¼	½	7 ½	10	1 ¼	1 ½
411-3/4	3 ¼	¾	10 ½	13	1 ¼	3
411-01	3 ¼	1	13 ½	16	1 ¼	4
411-01.5	4 ½	1 ½	20	23	1 ½	7
411-02	5	2	30	34 ½	2 ¼	13
411-02.5	6	2 ½	30 ½	35 ½	2 ½	17
411-03	6 ½	3	37 ¼	43 ¼	3	28
411-03.5	8	3 ½	38 ½	44	2 ¾	35
411-04	10	4	47	53	3	50
411-05	12	5	50	56	3	68
411-06	12	6	60	66	3	89
411-08	14	8	57 ½	63 ½	3	105
411-10	16	10	69 ½	75 ½	3	156
411-12	18	12	81 ½	87 ½	3	222
411-14	20	14	88	96	4	300
411-16	22	16	100	108	4	373
411-18	24	18	112	120	4	518
411-20	26	20	124	134	5	707
411-22	28	22	137	147	5	825
411-24	30	24	149	159	5	965
411-26	36	26	163	173	5	1,275
411-28	36	28	174	184	5	1,500
411-30	36	30	185	195	5	1,775
411-32	42	32	199	209	5	2,580
411-34	42	34	210	220	5	2,625
411-36	42	26	221	231	5	2,700
411-38	48	38	235	247	6	3,500
411-40	48	40	246	258	6	3,800
411-42	48	42	257	269	6	4,200

**VANEC Industrial Silencers**

716-827-4959