


VANEC

Model 552 Vent & Blowdown Silencer

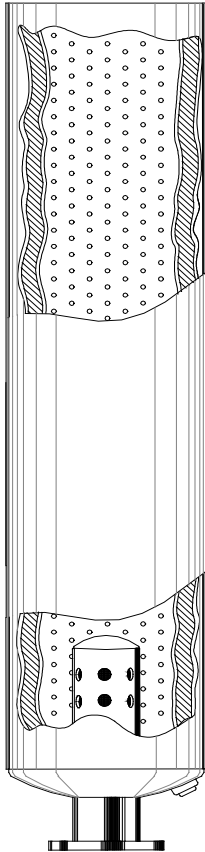


Standard Features:

- ✓ All Steel Welded Construction
- ✓ Quality Fabrication Techniques
- ✓ Condensate Drain
- ✓ Fiberglass Absorptive Pack
- ✓ Plate Flanges to Match ASA 125# Flanges
- ✓ Prime Coated Exterior Surfaces

Optional Features:

- ✓ Materials as Specified
- ✓ Finish as Specified
- ✓ Mounting Brackets
- ✓ Threaded Connections Available
- ✓ Companion Flanges
- ✓ Flange Drilling as Specified

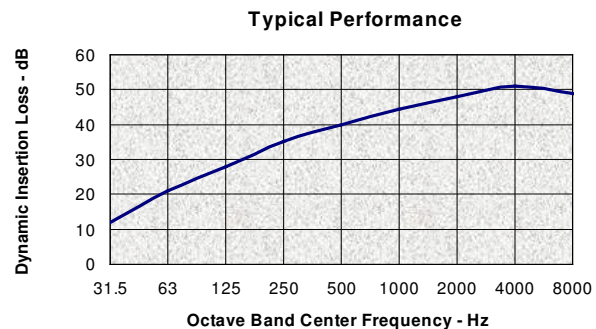


Application:

The **VANEC** Model 552 Vent and Blowdown Silencer is designed for use in suppressing the noise associated with venting high-pressure gas or steam to atmospheric pressure.

The Model 552 Vent & Blowdown Silencer, when properly applied, will reduce the gas discharge noise to a community acceptable level for dwellings located further than 800 ft. from the vent or blowdown. Silencer performance will depend upon actual operating conditions.

The **VANEC** Model 552 Vent and Blowdown Silencer is usually mounted vertically, but could also be mounted horizontally.

Issue: 10/2002

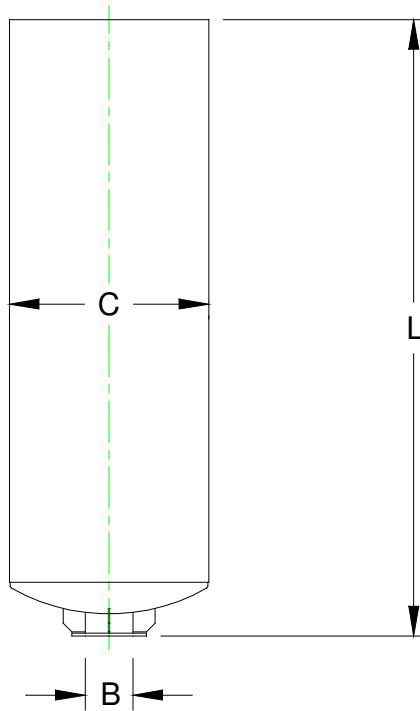

VANEC Model 552

Size	Dimensions in Inches			Est.Wt. Lbs.
	B	C	L	
552-06	3	12	72	230
552-08	4	14	84	320
552-10	5	16	90	430
552-12	6	18	116	550
552-14	6	20	162	950
552-16	8	22	168	1,050
552-18	8	24	172	1,200
552-20	10	26	183	1,500
552-22	10	28	196	1,700
552-24	12	30	212	2,000
552-26	12	32	225	2,450
552-28	14	34	226	2,900
552-30	14	36	250	3,300
552-36	18	42	310	4,800
552-42	20	48	360	6,500

VANEC Industrial Silencers
716-827-4959