
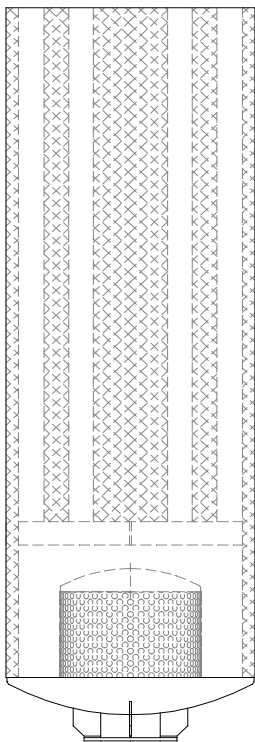


Model 563 Vent & Blowdown Silencer




Standard Features:

- ✓ All Steel Welded Construction
- ✓ Quality Fabrication Techniques
- ✓ Condensate Drain
- ✓ Fiberglass Absorptive Pack
- ✓ Plate Flanges to Match ASA 125# Flanges
- ✓ Prime Coated Exterior Surfaces

Optional Features:

- ✓ Materials as Specified
- ✓ Finish as Specified
- ✓ Mounting Brackets or Support
- ✓ Threaded Connections Available
- ✓ Companion Flanges
- ✓ Flange Drilling as Specified

Typical Performance

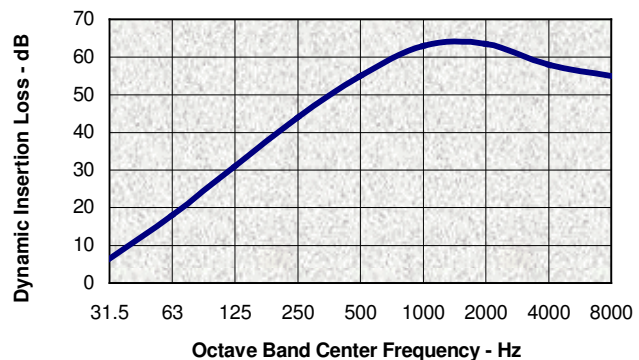


Application:

The **VANEC** Model 563 Vent and Blowdown Silencer is designed for use in suppressing the noise associated with venting high-pressure gas or steam to atmospheric pressure.

The Model 563 Vent & Blowdown Silencer, when properly applied, will reduce the gas discharge noise to a community acceptable level for dwellings located further than 400 ft. from the vent or blowdown. Silencer performance will depend upon actual operating conditions.

The **VANEC** Model 563 Vent and Blowdown Silencer is usually mounted vertically, but could also be mounted horizontally.

Issue: 10/2002

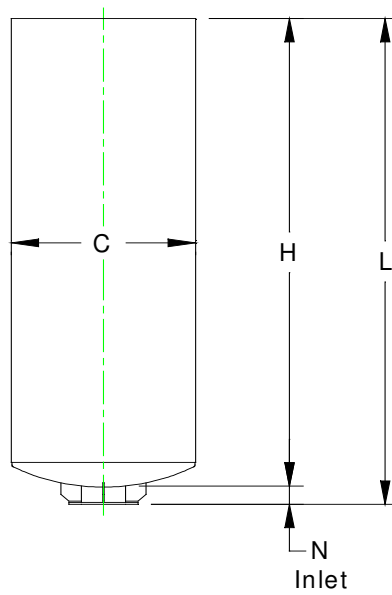

VANEC Model 563

Size	Dimensions in Inches				Est. Wt. Lbs.
	C	H	L	N	
563-12	22	111	115	4	800
563-14	24	118	122	4	940
563-16	28	131	135	4	1,375
563-18	30	143	147	4	1,850
563-20	32	156	160	4	2,000
563-24	36	186	190	4	2,875
563-26	42	193	197	4	3,600
563-28	48	194	198	4	4,250
563-32	54	200	204	4	5,115
563-42	60	213	217	4	7,625
563-44	66	215	219	4	8,890
563-48	72	216	220	4	10,190
563-50	78	223	227	4	11,740
563-58	84	229	233	4	13,750
563-62	90	230	234	4	15,380
563-66	96	243	247	4	18,900
563-68	102	250	254	4	20,500
563-76	108	257	261	4	24,500
563-78	114	264	268	4	27,000
563-82	120	276	280	4	30,100
563-86	126	283	287	4	33,000
563-92	132	296	300	4	36,600
563-96	138	302	306	4	39,750
563-100	144	309	313	4	42,700

VANEC Industrial Silencers

716-827-4959

www.vanec.com